



FR2A THRU FR2M

2.0 AMP Surface Mount Fast Recovery Rectifier

1. Features

- Glass passivated chip junction
- For surface mounted application.
- Low forward voltage drop.
- High current capability.
- Fast switching for fast recovery
- High reliability.
- Meets MSL level 1, per J-STD-020.

2. Mechanical Data

- Case:Molded Plastic,SMB(DO-214AA) .
- Epoxy:UL 94V-0 rate flame retardant.
- Terminals:Plated Leads Solderable per MIL-STD-750,Method-2026.
- Marking:marked on body.

SMB(DO-214AA)



3. Maximum Ratings and Electrical Characteristics

Electrical Characteristics Rating at 25°C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	FR2A	FR2B	FR2D	FR2G	FR2J	FR2K	FR2M	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Average Rectified Output Current @TL=90 °C	IF(AV)	2.0							A
Peak Forward Surge Current 8.3ms @Tj=25°C	IFSM	60							A
Single half sine-wave superimposed @Tj=125°C on rated load (JEDEC Method)		48							
I²t Rating for Fusing (t < 8.3ms)	I²t	14.94							A²S
Maximum Instantaneous Forward Voltage @IF=2A	VFM	1.3							V
Maximum DC reverse current @Tj=25°C	IR	5.0							uA
at rated DC blocking voltage @Tj=125°C		100							
Maximum Reverse Recovery Time (Note 1)	TRR	150				250	500		ns
Typical Junction Capacitance (Note 2)	Cj	18				12	10		pF
Typical Thermal Resistance (Note 3)	RθJA	65							°C/W
	RθJL	20							
	RθJC	18							
Operating Temperature Range	Tj	-55 to+150							°C
Storage Temperature Range	TSTG	-55 to+150							°C

Note:

1. Reverse RecoveryTest Conditions:IF=0.5A,IR=1.0A,IRR=0.25A.
2. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C
3. Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas.



4. Rating And Characteristic Curves

Fig. 1 Forward Current Derating Curve

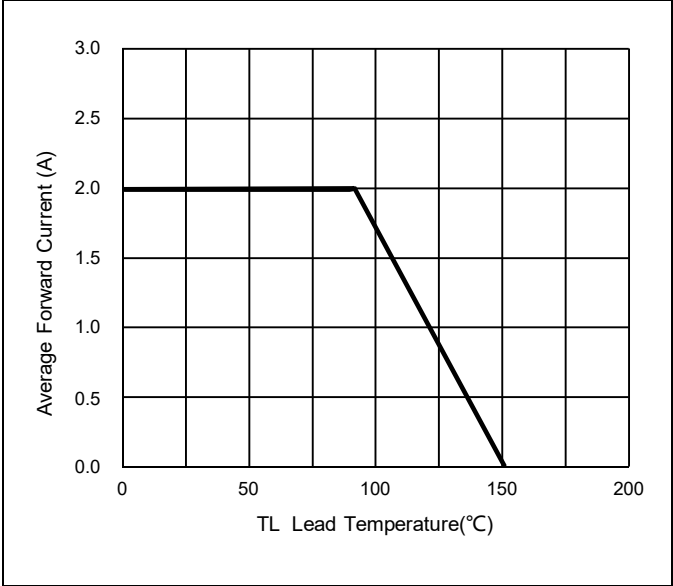


Fig. 2 Typical Forward Characteristics

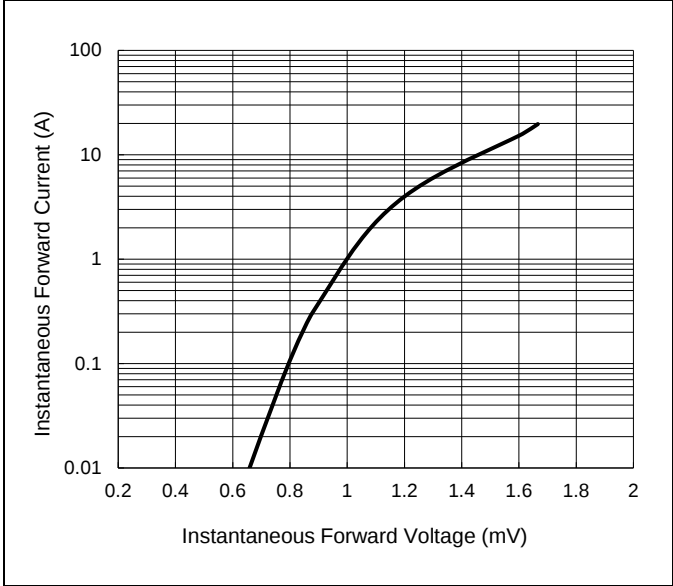


Fig. 3 Forward Surge Current Capability


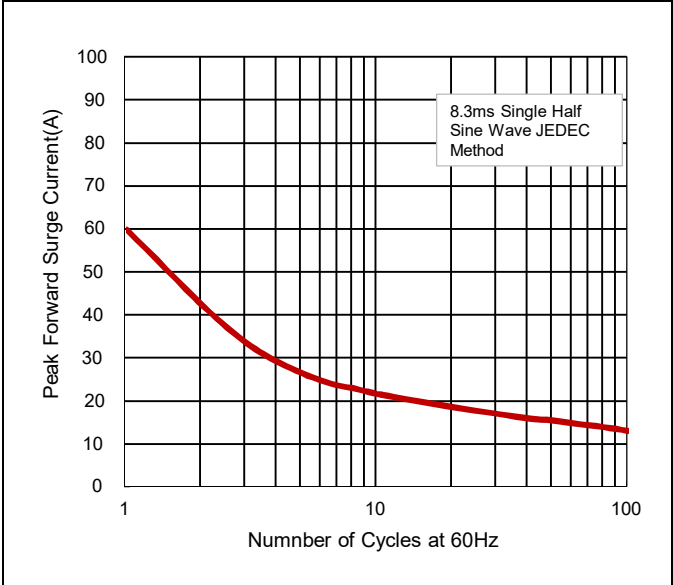


Fig.4 Typical Reverse Characteristics




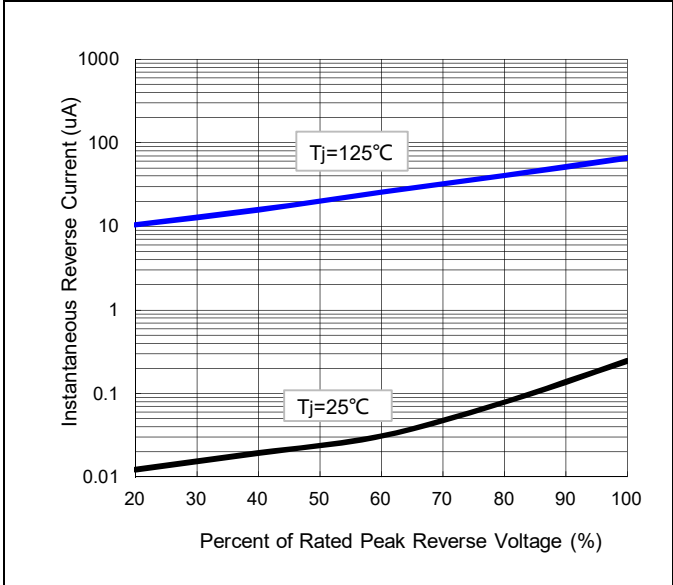

FR2A THRU FR2M


2.0 AMP Surface Mount Fast Recovery Rectifier

5. Soldering Parameters

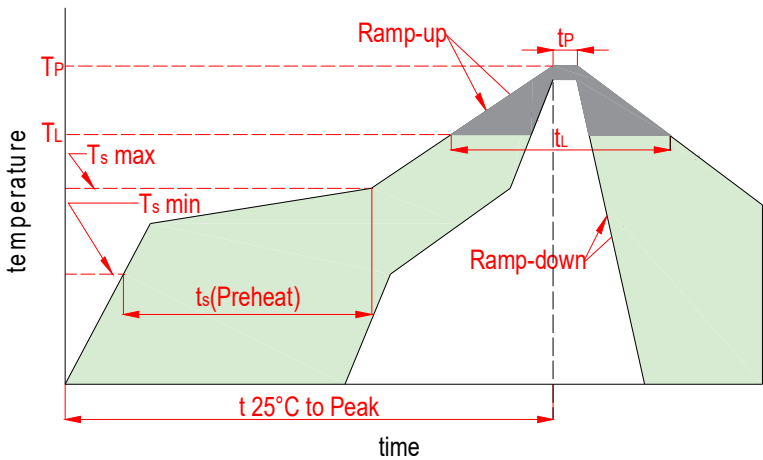


Reflow Condition		Lead-free
Pre Heat	Temp. min($T_s(\min)$)	150℃
	Temp. max($T_s(\min)$)	200℃
	Time(min to max)(t_s)	60~120s
Aver. ramp up rate(Liquidus Temp.)(T_L)to peak		3℃/s max
$T_s(\max)$ to T_L -Ramp-up Rate		3℃/s max
Reflow	Temp.(T_L)(Liquidus)	217℃
	Temp.(t_L)(Liquidus)	60~150s
Peak Temp.(T_p)		260 ^{+0/-5} ℃
Time within actual peak Temp.(t_p)		30s max
Ramp-down Rate		6℃/s max
Time 25℃ to peak Tempe.(T_p)		8 minutes max
Do not exceed		260℃

6. Dimensions


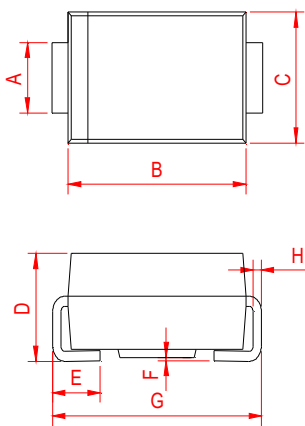


Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.071	0.087	1.8	2.2
B	0.163	0.187	4.15	4.75
C	0.130	0.154	3.3	3.9
D	0.084	0.102	2.13	2.6
E	0.033	0.057	0.85	1.45
F	0.000	0.008	0.0	0.2
G	0.197	0.217	5.0	5.5
H	0.004	0.012	0.1	0.3

Mounting PAD Layout



7. Part Marking System

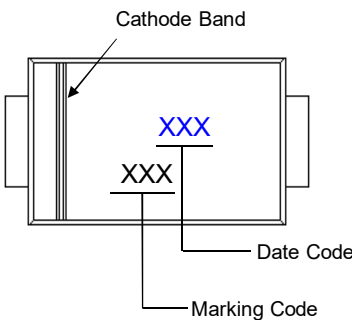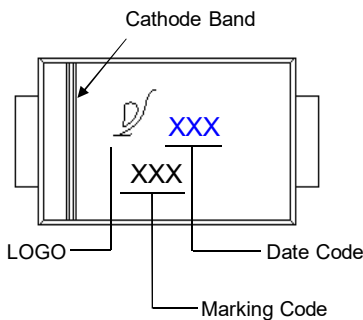

8. Package Information

Package	Tape Width (mm)	Reel Size		Quantity(pcs)
		mm	inch	
SMB(DO-214AA)	12	330	13	3000



Important Notice and Disclaimer

- Reproducing and modifying information of the document is prohibited without from XINNUO.
- XINNUO reserves the right to make changes to this document and its products and specifications.
- XINNUO disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- XINNUO does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the here in document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. XINNUO makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown her are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify XINNUO for any damages resulting from such improper use or sale.
- Since XINNUO uses lot number as the tracking base, please provide the lot number for tracking when complaining.