




1.Features

- Trench Technology Power MOSFET
- Low RDS(ON)
- Low Gate Charge
- Low Gate Resistance


2.Mechanical Data

- Case:Molded Plastic,SOT-23
- Epoxy:UL 94V-0 rate flame retardant
- Terminals:Plated Leads Solderable per MIL-STD-750,Method-2026.
- Marking: marked on body.
- Marking:S1
- Mounting Position : Any.

SOT-23



- 1.Gate
- 2. Source
- 3. Drain



3.Maximum Ratings and Electrical Characteristics

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 12	V
Drain Current-Continuous ^{1,5}	I_D	-2.3	A
Drain Current – Pulsed ²	I_{DM}	-10	A
Maximum Power Dissipation ^{4,5}	P_D	1	W
Junction Temperature	T_J	-55 ~ +150	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-55 ~ +150	$^{\circ}\text{C}$

**4. Electrical Characteristics ($T_c=25^{\circ}\text{C}$ unless otherwise specified)**

Characteristics	Symbol	Test conditions	Min	TYP	Max	Unit
Static Characteristics						
Drain -Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}= 0V, I_D=-250\mu A$	-20	-	-	V
Gate-source threshold voltage ³	$V_{GS(th)}$	$V_{DS} =V_{GS}, I_D=-250\mu A$	-0.4	-	-1	V
Drain-Source Leakage Current	I_{DSS}	$V_{DS}= -20V, V_{GS}= 0V$	-	-	-1	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS}= \pm 10V, V_{DS}= 0V$	-	-	± 100	nA
Static Drain- Source On State Resistance ³	$R_{DS(on)}$	$V_{GS}=-4.5V, I_D=-2A$	-	95	125	m Ω
		$V_{GS}=-2.5V, I_D=-1A$	-	130	180	
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS} =-10V, V_{GS} =0V, f =1MHz$	-	406	-	pF
Output Capacitance	C_{oss}		-	52	-	
Reverse Transfer Capacitance	C_{rss}		-	44	-	
Switching Characteristics						
Turn-on Delay Time	$t_{d(on)}$	$I_D=-1A, V_{DD}=-10V,$ $V_{GS}=-4.5V, R_G=2.5\Omega$	-	10	-	ns
Turn-on Rise Time	t_r		-	51.7	-	
Turn-off Delay Time	$t_{d(off)}$		-	44	-	
Turn-off Fall Time	t_f		-	8	-	
Total Gate Charge	Q_g	$V_{DS} =-10V, V_{GS} =-4.5V, I_D =-2A$	-	8.2	-	nC
Gate-Source Charge	Q_{gs}		-	1.5	-	
Gate-Drain Charge	Q_{gd}		-	1.2	-	
Source-drain diode characteristics and maximum ratings						
Diode Forward Voltage ³	V_{SD}	$V_{GS} = 0V, I_S = -1A$	-	-	-1.2	V

Notes:

- 1.The maximum current rating is limited by package.
- 2.Pulse Test : Pulse Width $\leq 10\mu s$, duty cycle $\leq 1\%$.
- 3.Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.
- 4.The power dissipation PD is limited by $T_J(MAX) = 150^{\circ}\text{C}$.
- 5.Device mounted on 1in2 FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^{\circ}\text{C}$



5. Rating And Characteristic Curves

Fig.1 Output Characteristics

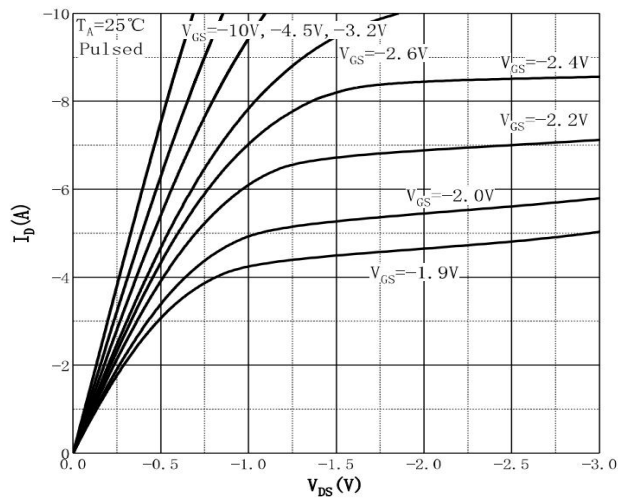


Fig.2 Transfer Characteristics

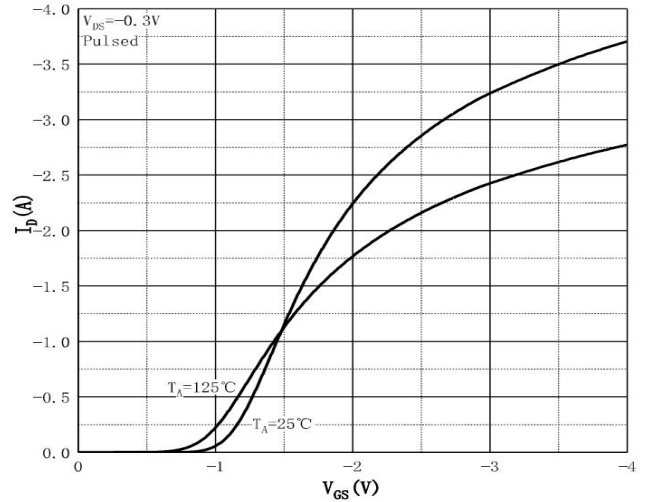


Fig.3 On-resistance vs. Drain Current

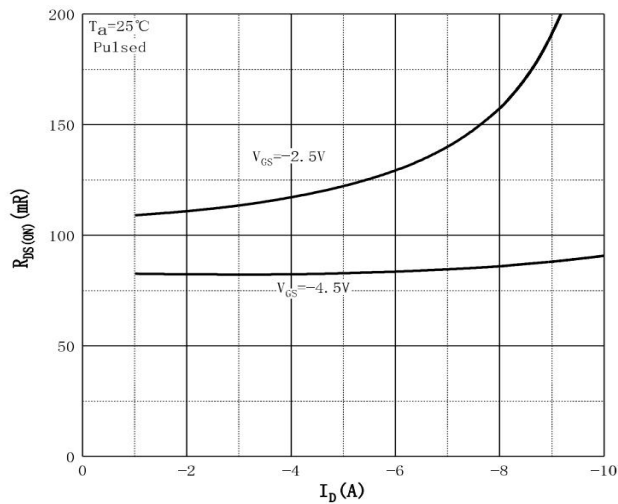


Fig.4 On-resistance vs. Gate-source Voltage

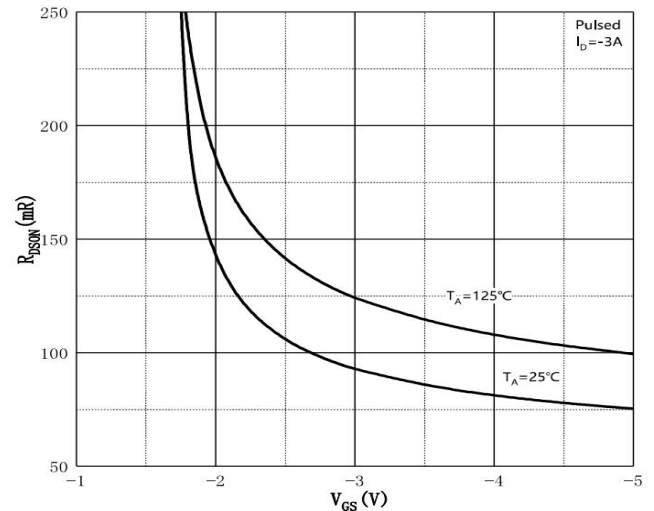


Fig.5 I_S vs. V_{DS}



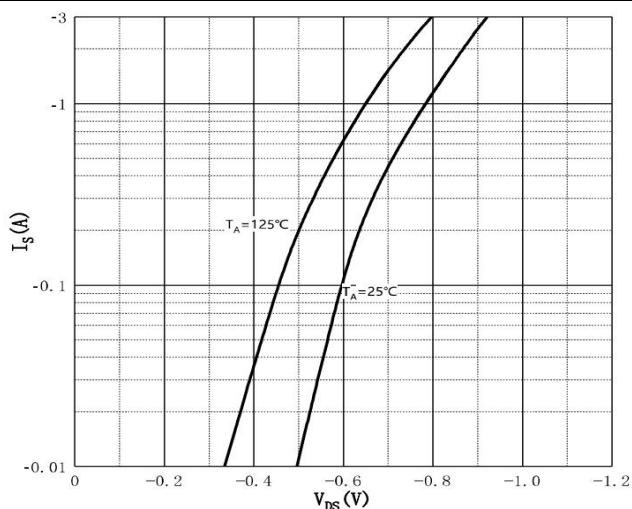


Fig.6 Threshold Voltage



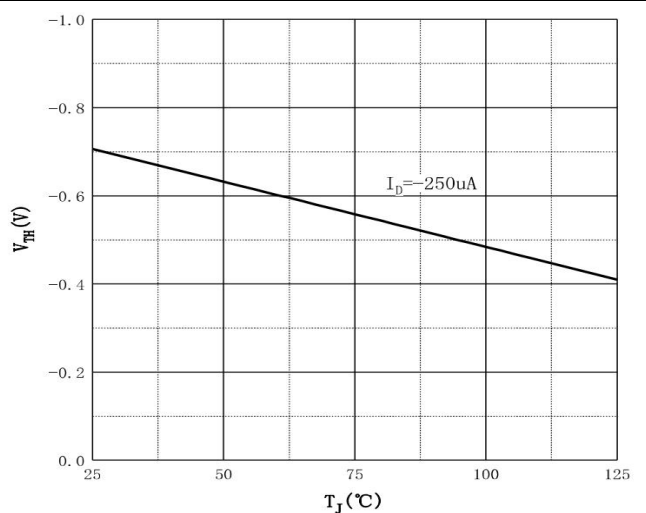


6. Soldering Parameters

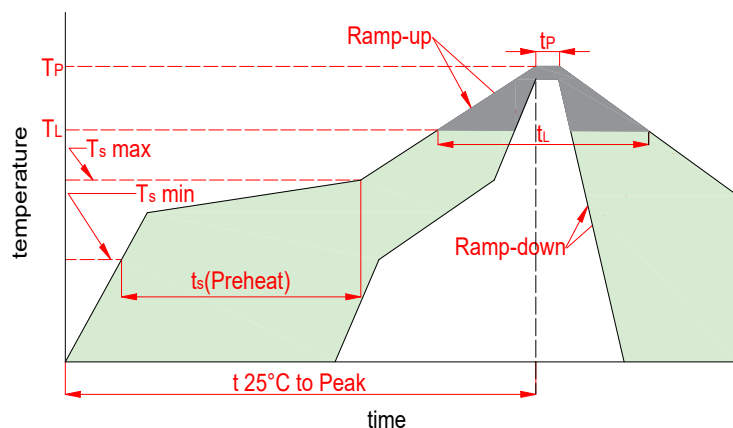


Reflow Condition		Lead-free
Pre Heat	Temp. min(T_s (min))	150℃
	Temp. max(T_s (min))	200℃
	Time(min to max)(t_s)	60~120s
Aver. ramp up rate(Liquidus Temp.)(T_L)to peak		3℃/s max
T_s (max) to T_L -Ramp-up Rate		3℃/s max
Reflow	Temp.(T_L)(Liquidus)	217℃
	Temp.(t_L)(Liquidus)	60~150s
Peak Temp.(T_P)		260 ^{+0/-5} ℃
Time within actual peak Temp.(t_p)		30s max
Ramp-down Rate		6℃/s max
Time 25℃ to peak Tempe.(T_P)		8 minutes max
Do not exceed		260℃

7. Dimensions

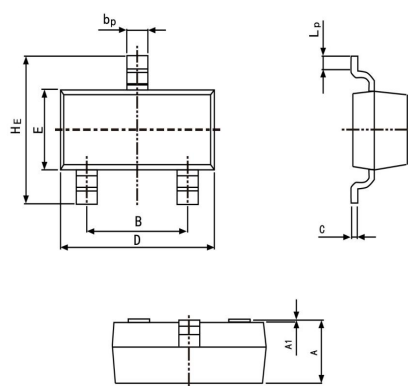


Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.035	0.045	0.90	1.15
B	0.070	0.081	1.78	2.05
bp	0.012	0.020	0.30	0.51
C	0.003	0.007	0.08	0.18
D	0.110	0.118	2.80	3.00
E	0.047	0.055	1.20	1.40
HE	0.087	0.110	2.20	2.80
A1	0.000	0.004	0.00	0.10
LP	0.008	0.020	0.20	0.50

Mounting PAD Layout



8. Part Marking System



9. Package Information

Package	Part Number	Tape Width(mm)	Quantity(pcs)
SOT-23	XN2301	8	3000



Important Notice and Disclaimer

- Reproducing and modifying information of the document is prohibited without from XINNUO.
- XINNUO reserves the right to make changes to this document and its products and specifications.
- XINNUO disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- XINNUO does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the here in document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. XINNUO makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown her are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify XINNUO for any damages resulting from such improper use or sale.
- Since XINNUO uses lot number as the tracking base, please provide the lot number for tracking when complaining.