



1. Features

- Low on-resistance
- Fast switching speed
- Low voltage drive makes this device ideal for portable equipment
- Easily designed drive circuits
- Easy to parallel


2. Mechanical Data

- Case:Molded Plastic,SOT-323 .
- Epoxy:UL 94V-0 rate flame retardant
- Terminals:Plated Leads Solderable perMIL-STD-750,Method-2026.
- Marking: KN
- Mounting Position : Any.

SOT-323



1 Gate
2 Source
3 Drain



3. Maximum Ratings and Electrical Characteristics

Rating at 25℃ ambient temperature unless otherwise specified.

Parameter	Symbol	Value	UNIT
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	100	mA
Power Dissipation	P_D	200	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	625	℃/W
Junction and Storage Temperature Range	T_J, T_{STG}	-55~ +150	℃



4. Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Off Characteristics						
Drain-source breakdown voltage	V _(BR) DSS	V _{GS} = 0V, I _D = 10μA	30			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =30V, V _{GS} = 0V			0.2	μA
Gate-source leakage current	I _{GSS}	V _{GS} =±20V, V _{DS} = 0V			±2	μA
On characteristics						
Drain-source on-resistance	R _{DS(on)}	V _{GS} =4V, I _D =10mA			8	Ω
		V _{GS} =2.5V, I _D =1mA			13	Ω
Gate threshold voltage	V _{GS(th)}	V _{DS} =3V, I _D =100μA	0.8		1.5	V
Dynamic Characteristics						
Input capacitance	C _{iss}	V _{DS} =5V, V _{GS} =0V, f =1MHz		13		pF
Output capacitance	C _{oss}			9		pF
Reverse transfer capacitance	C _{rss}			4		pF
Switching Characteristics						
Turn-on delay time	t _{d(on)}	V _{DD} =5V, V _{GS} =5V, R _L =500Ω, R _g =10Ω			15	ns
Rise Time	t _r				35	ns
Turn-off delay time	t _{d(off)}				80	ns
Fall Time	t _f				80	ns



5. Rating And Characteristic Curves

Fig1: Output Characteristics

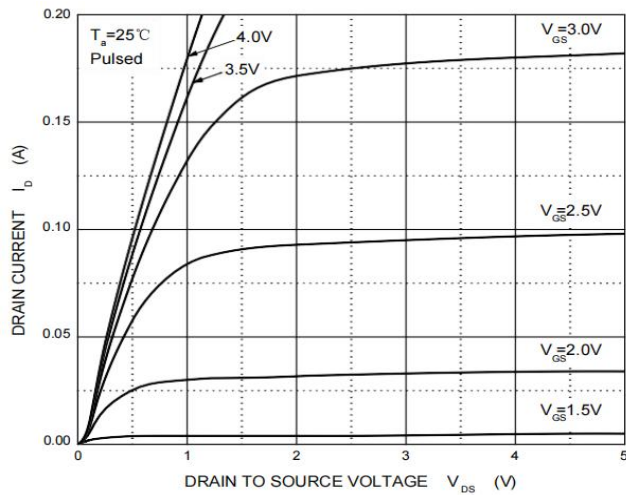


Fig2: Transfer Characteristics

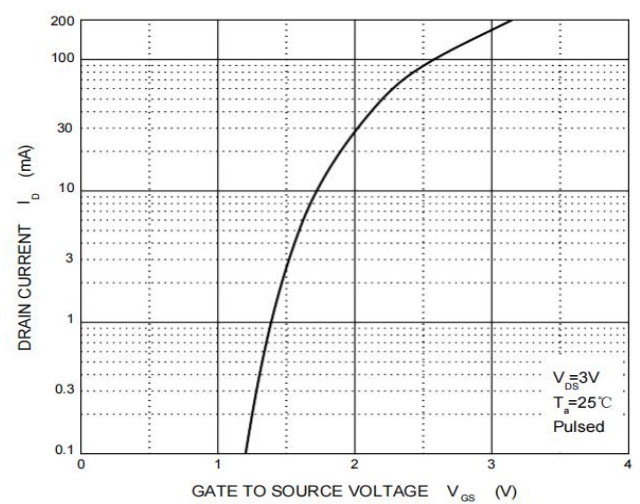


Fig.3 $R_{DS(on)} - I_D$

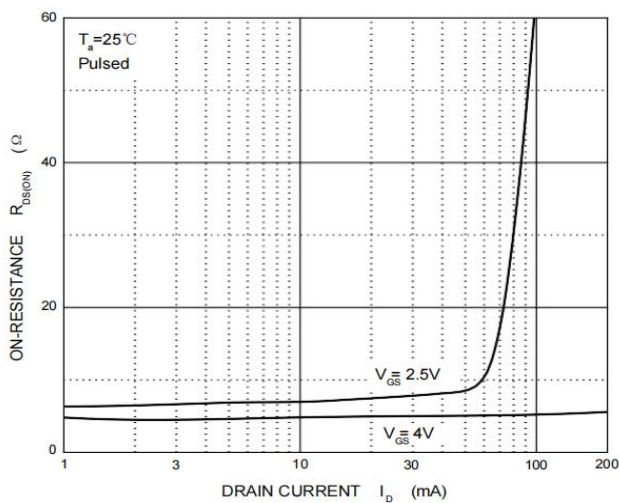


Fig.4 $R_{DS(on)} - V_{GS}$

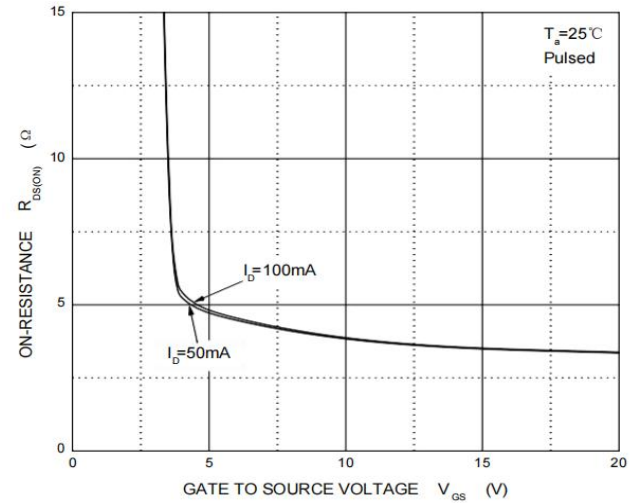


Fig.5 $I_S - V_{SD}$



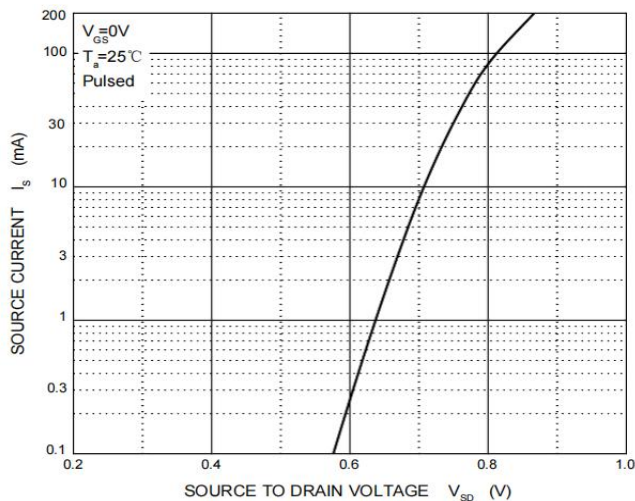


Fig.6 $P_D - T_a$



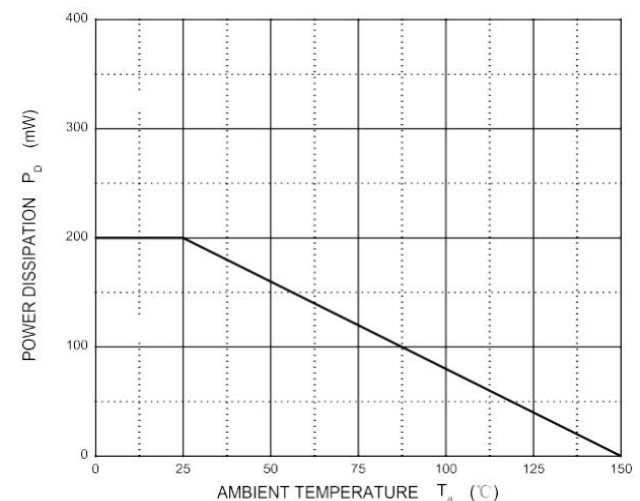


6. Soldering Parameters

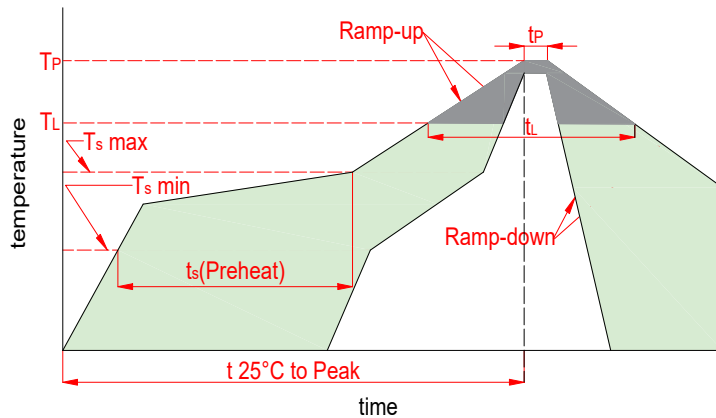


Reflow Condition		Lead-free
Pre Heat	Temp. min(T_s (min))	150℃
	Temp. max(T_s (min))	200℃
	Time(min to max)(t_s)	60~120s
Aver. ramp up rate(Liquidus Temp.)(T_L)to peak		3℃/s max
T_s (max) to T_L -Ramp-up Rate		3℃/s max
Reflow	Temp. (T_L)(Liquidus)	217℃
	Temp. (t_L)(Liquidus)	60~150s
Peak Temp. (T_P)		260 ^{+0/-5} ℃
Time within actual peak Temp. (t_p)		30s max
Ramp-down Rate		6℃/s max
Time 25℃ to peak Tempe. (T_P)		8 minutes max
Do not exceed		260℃

7. Dimensions

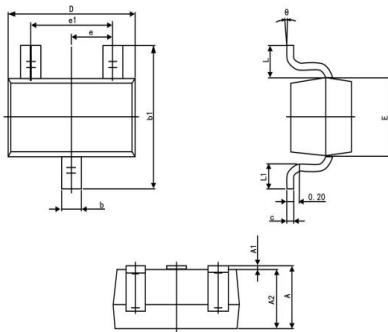


Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.035	0.043	0.900	1.100
A1	0.000	0.004	0.000	0.100
A2	0.035	0.039	0.900	1.000
b	0.008	0.016	0.200	0.400
c	0.003	0.006	0.080	0.150
D	0.079	0.087	2.000	2.200
E	0.045	0.053	1.150	1.350
E1	0.085	0.096	2.150	2.450
e1	0.047	0.055	1.200	1.400
L1	0.010	0.018	0.260	0.460

Mounting PAD Layout



8. Part Marking System



9. Package Information

Package	Part Number	Tape Width(mm)	Quantity(pcs)
SOT-323	2SK3018W	8	3000



Important Notice and Disclaimer

- Reproducing and modifying information of the document is prohibited without from XINNUO.
- XINNUO reserves the right to make changes to this document and its products and specifications.
- XINNUO disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- XINNUO does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the here in document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. XINNUO makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown her are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify XINNUO for any damages resulting from such improper use or sale.
- Since XINNUO uses lot number as the tracking base, please provide the lot number for tracking when complaining.