





1. Features

- Fast Switching Speed
- For General Purpose Switching Applications
- High Conductance

SOT-23-3L



2. Mechanical Data

- Case:Molded Plastic,SOT-23-3L.
- Epoxy:UL 94V-0 rate flame retardant.
- Terminals:Plated Leads Solderable per MIL-STD-750, Method-2026.
- Marking:A7
- Marking:marked on body.

3. Maximum Ratings

Electrical Characteristics Rating at 25°C ambient temperature unless otherwise specified.

Characteristic	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	85	V
Reverse Voltage	V_R	75	V
Continuous Forward Current(Double Diode Loaded)	I_F	125	mA
Continuous Forward Current(Single Diode Loaded)	I_F	215	mA
Repetitive Peak Forward Current	I_{FRM}	450	mA
Non-Repetitive Peak Forward Current	I_{FSM}	0.5	A
$t = 1\text{ s}$		1	
$t = 1\text{ ms}$		4.5	
$t = 1\text{ }\mu\text{s}$			
Power Dissipation	P_{tot}	350	mW
Junction Temperature	T_J	-65 to +150	°C
Storage Temperature Range	T_{stg}	-65 to +150	°C

4. Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameters	Symbol	Cindition	Min	TYP	Max	Unit
Forward Voltage	V_F	$I_F = 1\text{mA}$ $I_F = 10\text{mA}$ $I_F = 50\text{mA}$ $I_F = 150\text{mA}$	-	-	0.715 0.855 1 1.25	V
Reverse Current	I_R	$V_R = 25\text{V}$	-	-	30	nA
		$V_R = 75\text{V}$	-	-	1	μA
		$V_R = 25\text{V}, T_J=150^\circ\text{C}$	-	-	30	μA
		$V_R = 75\text{V}, T_J=150^\circ\text{C}$	-	-	50	μA
Diode Capacitance	C_d	$V_R = 0\text{ V}, f = 1\text{ MHz}$	-	-	1.5	pF
Reverse Recovery Time	t_{rr}	$I_F=I_R=10\text{mA}, I_{tr}=0.1*I_R,$ $R_L=100\Omega$	-	-	4	ns



5. Rating And Characteristic Curves

Fig.1 Reverse Voltage vs Reverse Current BV 1.0 to 100uA

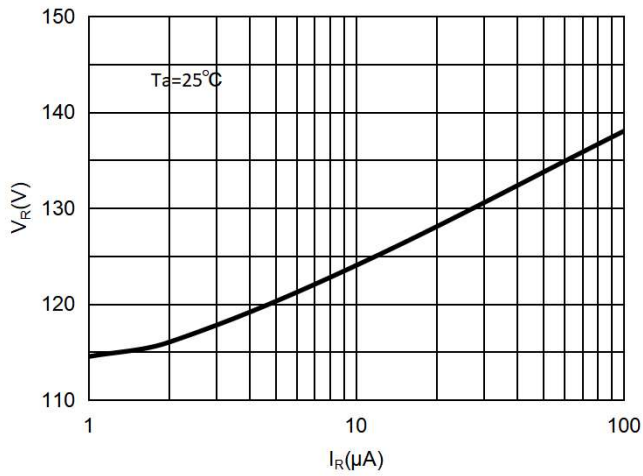


Fig.2 Reverse Current vs Reverse Voltage I_R 10 to 100 V

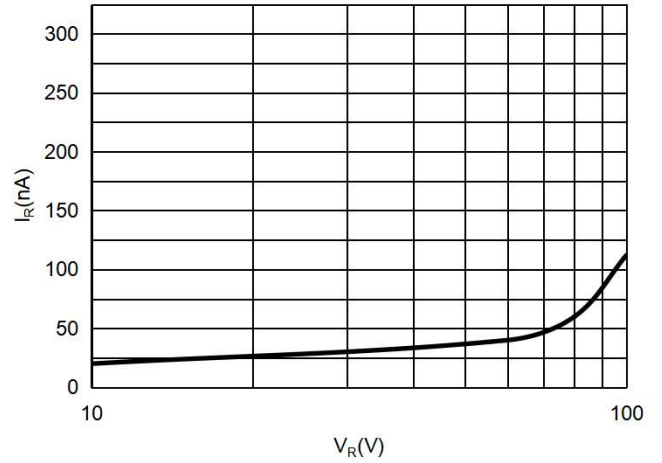


Fig.3 Forward Voltage vs Forward Current V_F 1.0 to 100 uA

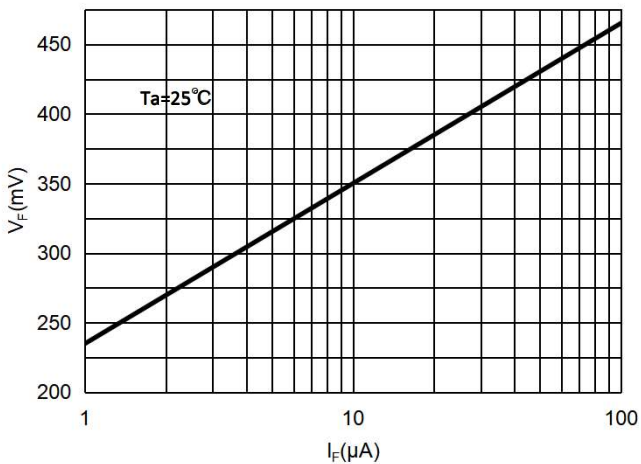


Fig.4 Forward Voltage vs Forward Current V_F 0.1 to 10mA

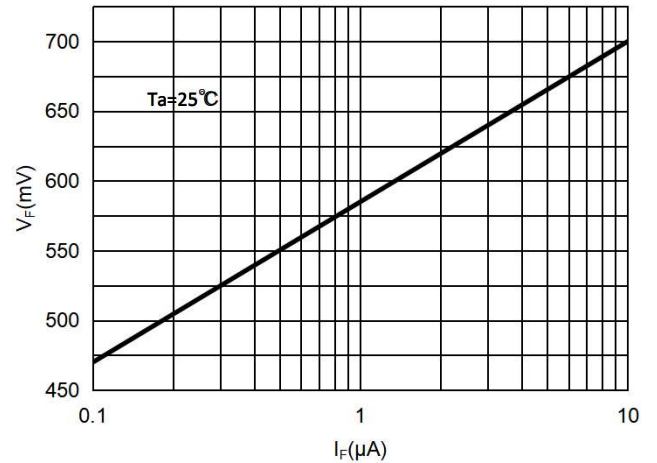


Fig.5 Forward Voltage vs Forward Current V_F -10-800 mA

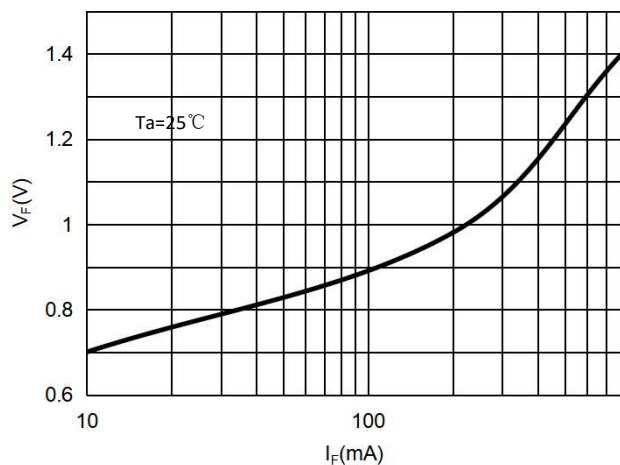


Fig.6 Total Capacitance vs Reverse Voltage

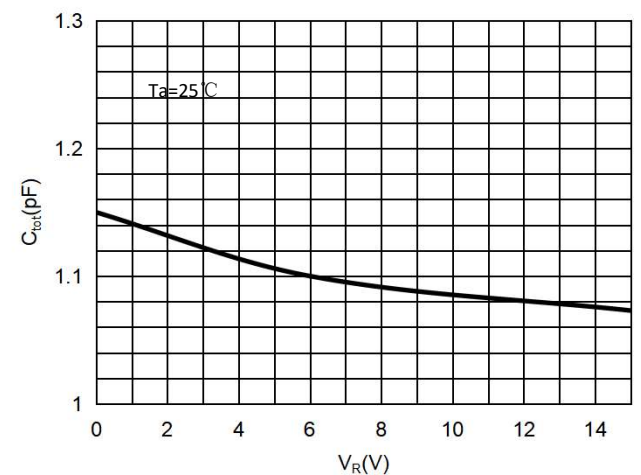




Fig.7 Reverse Recovery Time vs Reverse Current



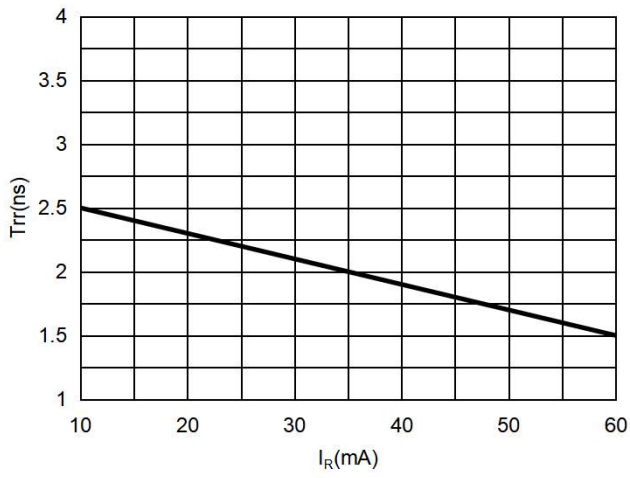


Fig.8 Average Rectified Current vs Ambient Temperature



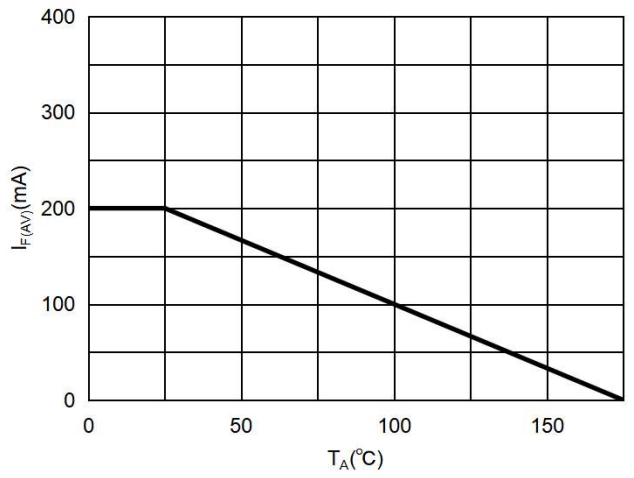


6. Soldering Parameters

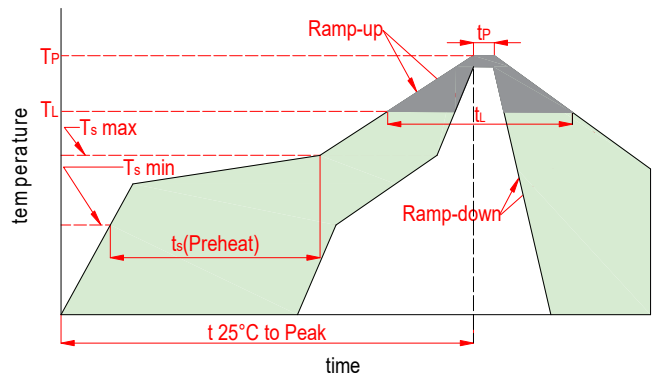


Reflow Condition		Lead-free
Pre Heat	Temp. min(T_s (min))	150℃
	Temp. max(T_s (min))	200℃
	Time(min to max)(t_s)	60~120s
Aver. ramp up rate(Liquidus Temp.)(T_L)to peak		3℃/s max
T_s (max) to T_L -Ramp-up Rate		3℃/s max
Reflow	Temp.(T_L)(Liquidus)	217℃
	Temp.(t_L)(Liquidus)	60~150s
Peak Temp.(T_P)		260 ^{+0/-5} ℃
Time within actual peak Temp.(t_p)		30s max
Ramp-down Rate		6℃/s max
Time 25℃ to peak Tempe.(T_p)		8 minutes max
Do not exceed		260℃

7. Dimensions

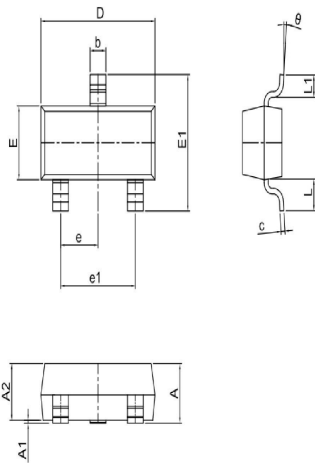


Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A2	0.041	0.047	1.050	1.200
A1	0.000	0.004	0.010	0.100
b	0.014	0.020	0.350	0.500
c	0.004	0.006	0.090	0.150
D	0.110	0.118	2.800	3.000
E	0.059	0.067	1.500	1.700
E1	0.102	0.118	2.600	3.000
e1	0.071	0.079	1.800	2.000
L1	0.010	0.022	0.250	0.550

Mounting PAD Layout



8. Part Marking System



9. Package Information

Package	Part Number	Marking Code	Tape Width(mm)	Quantity(pcs)
SOT-23-3L	BAV99	A7	8	3000



Important Notice and Disclaimer

- Reproducing and modifying information of the document is prohibited without from XINNUO.
- XINNUO reserves the right to make changes to this document and its products and specifications.
- XINNUO disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- XINNUO does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the here in document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. XINNUO makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown her are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify XINNUO for any damages resulting from such improper use or sale.
- Since XINNUO uses lot number as the tracking base, please provide the lot number for tracking when complaining.