




Features

- High breakdown voltage
- Low turn-on voltage
- Guard ring construction for transient protection


Mechanical Data

- Case:Molded Plastic,SOT-23
- Epoxy:UL 94V-0 rate flame retardant
- Terminals:Plated Leads Solderable perMIL-STD-750,Method-2026.
- Mounting Position : Any.
- Equivalent Circuit:


SOT-23

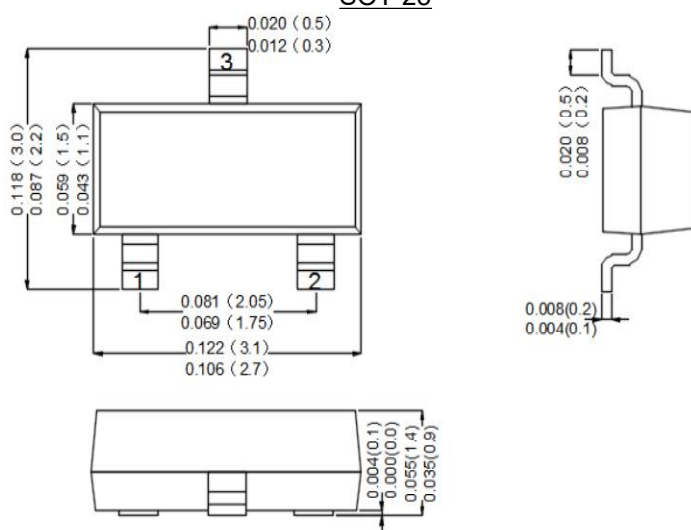


Dimensions in inches and (millimeters)




BAT46 MARKING: Z 4 6



BAT46A MARKING: A46



BAT46C MARKING: C46



BAT46S MARKING: S46

Maximum Ratings Maximum Ratings (Rating at 25°C ambient temperature unless otherwise specified.)

Parameter	Symbol	Limit	Unit
Peak repetitive peak reverse voltage	V_{RRM}	100	V
Working peak reverse voltage	V_{RWM}		
Forward continuous current	I_F	150	mA
Repetitive peak forward current @ $t_p < 1.0s$, Duty Cycle < 50%	I_{FRM}	350	mA
Non-repetitive Peak Forward surge current @ $t = 8.3ms$	I_{FSM}	750	mA
Power dissipation	P_D	500	mW
Thermal resistance junction to ambient air	$R_{\theta JA}$	200	°C/W
Junction temperature	T_j	125	°C
Storage temperature	T_{STG}	-55~+150	°C


Electrical Characteristics (Rating at 25°C ambient temperature unless otherwise specified.)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	V_R	$I_R = 100\mu A$	100			V
Reverse voltage leakage current	I_R	$V_{R1} = 1.5V$			0.3	μA
		$V_{R2} = 10V$			0.5	
		$V_{R3} = 50V$			1	
		$V_{R4} = 75V$			2	
Forward voltage(Note 2)	V_F	$I_{F1} = 0.1mA$			0.25	V
		$I_{F2} = 10mA$			0.45	
		$I_{F3} = 250mA$			1	
Diode capacitance	C_T	$V_R = 0, f = 1MHz$		20		pF
		$V_R = 1V, f = 1MHz$		12		




Rating And Characteristic Curves


Forward Characteristics

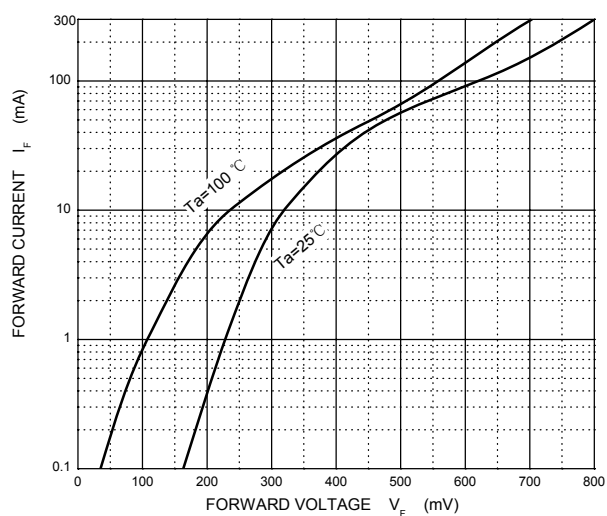


Reverse Characteristics

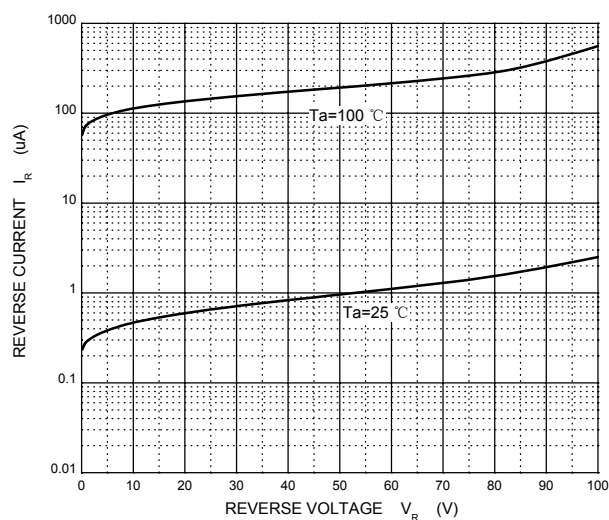

Capacitance Characteristics

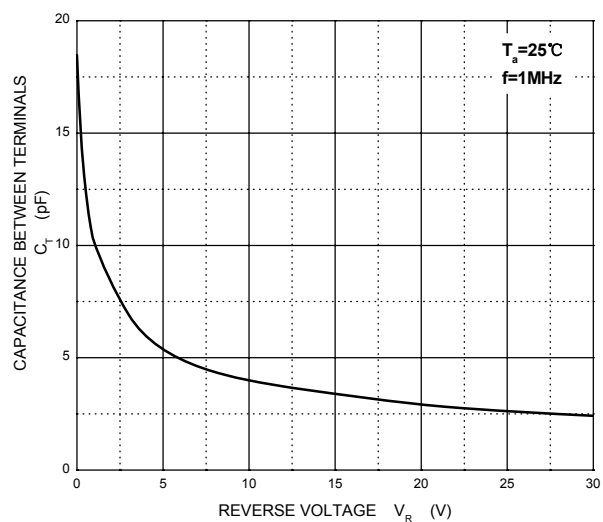

Power Derating Curve

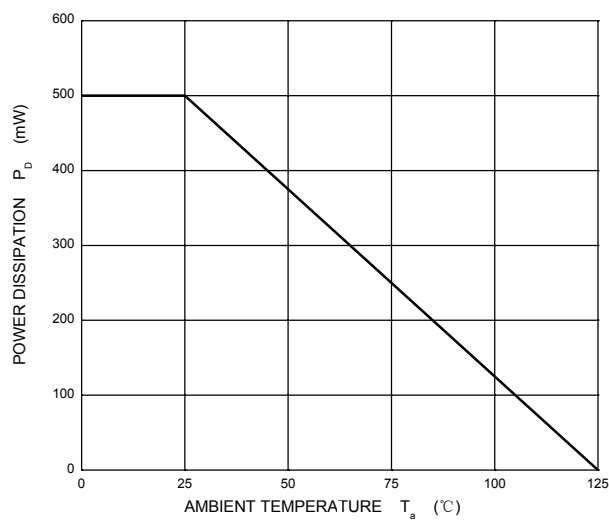



Important Notice and Disclaimer

- Reproducing and modifying information of the document is prohibited without from XINNUO.
- XINNUO reserves the right to make changes to this document and its products and specifications.
- XINNUO disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- XINNUO does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the here in document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. XINNUO makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown her are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify XINNUO for any damages resulting from such improper use or sale.
- Since XINNUO uses lot number as the tracking base, please provide the lot number for tracking when complaining.