




1.Features

Case:TO-126

- High current output up to 3A
- Low saturation voltage
- Complement to 2SB772



2.Mechanical Data

- Case:Molded Plastic,TO-126
- Epoxy:UL 94V-0 rate flame retardant
- Terminals:Plated Leads Solderable per MIL-STD-750,Method-2026.
- Marking: marked on body.
- Mounting Position : Any.

3.Maximum Ratings and Electrical Characteristics

Rating at 25°C Ambient temperature unless otherwise specified

Parameters	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	40	V
Collector-Emitter Voltage	V_{CEO}	30	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current -Continuous	I_C	3	A
Power Dissipation $T_A=25^\circ\text{C}$ $T_C=25^\circ\text{C}$	P_C	1 10	W
Junction Temperature	T_J	150	$^\circ\text{C}$
Operating and Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$

4.Electrical Characteristics (TA=25°C unless otherwise noted)

Parameters	Symbol	Cindition	Min	TYP	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu\text{A}, I_E=0$	40	-	-	V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1\text{mA}, I_B=0$	30	-	-	V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu\text{A}, I_C=0$	5	-	-	V
Collector cut-off current	I_{CEO}	$V_{CB}=40\text{V}, I_B=0$	-	-	1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=5\text{V}, I_B=0$	-	-	1	μA
DC current gain	h_{FE1}	$V_{CE}=2\text{V}, I_C=20\text{mA}$	80	-	-	-
	h_{FE2}	$V_{CE}=2\text{V}, I_C=1\text{A}$	100	-	400	-
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=2\text{A}, I_B=0.2\text{A}$	-	0.25	0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=2\text{A}, I_B=0.2\text{A}$	-	1	2	V
Transition frequency	f_T	$V_{CE}=5\text{V}, I_B=0.1\text{A}$	50	-	-	MHz
Output capacitance	C_{ob}	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$	-	45	-	pF

* Pulse test: $PW \leq 300\mu\text{s}$, duty cycle $\leq 2\%$ Pulse

5.h_{FE}2 Classification

Classification	Q	P	E
Range	100-200	160-320	200-400
Marking	2SD882Q	2SD882P	2SD882E



6. Rating And Characteristic Curves

Fig.1 Static Characteristic

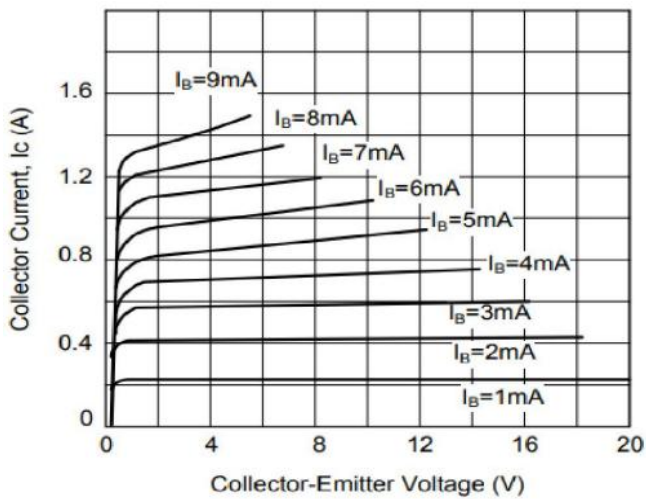


Fig.2 DC current Gain

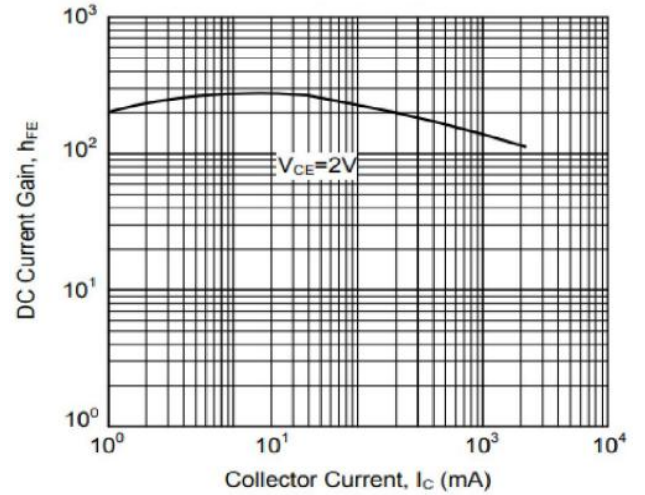


Fig.3 Base-Emitter/Collector-Emitter Saturation Voltage

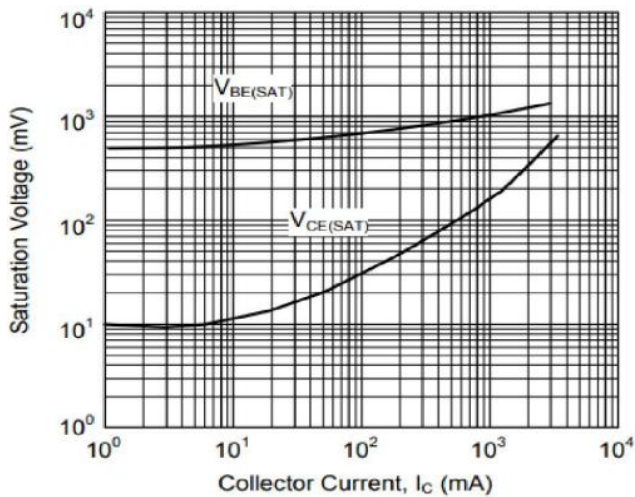


Fig.4 Collector Output Capacitance

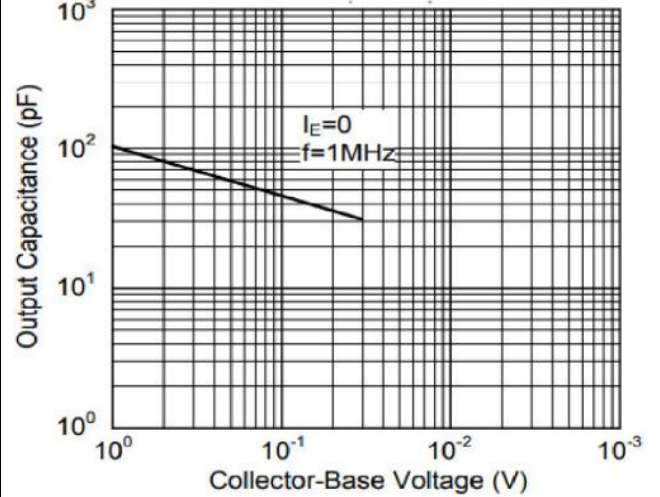


Fig.5 Current Gain-Bandwidth Product



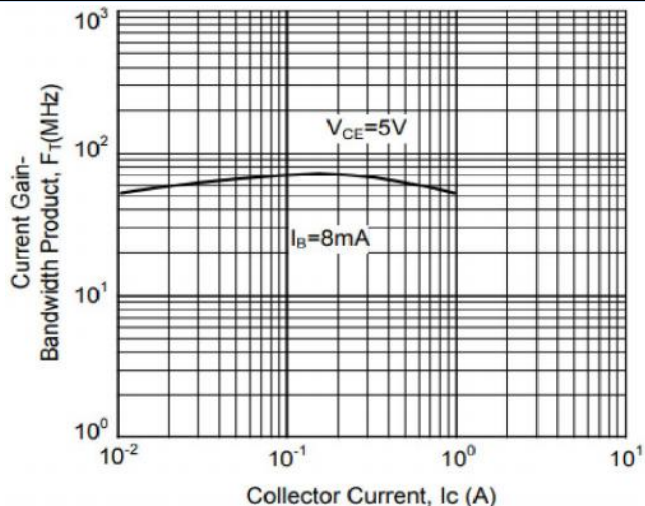


Fig.6 Safe Operating Area



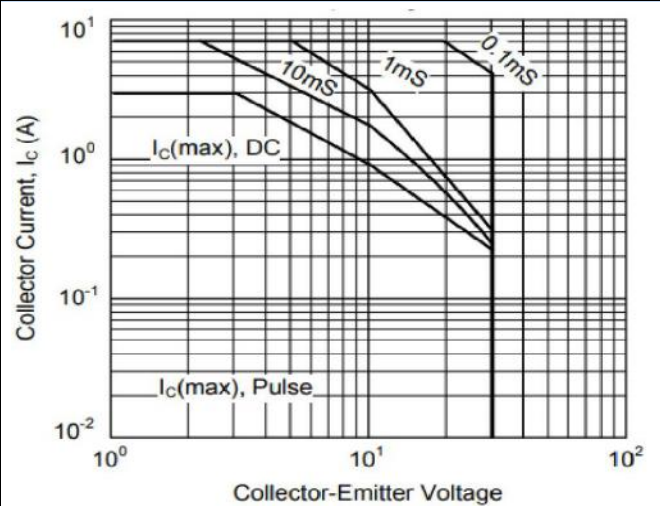


7. Dimensions

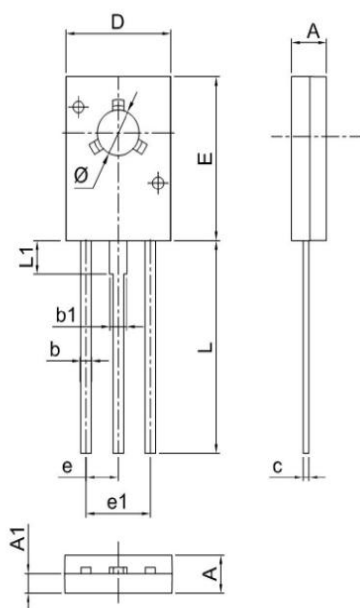

Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.094	0.110	2.40	2.80
A1	0.039	0.055	1.00	1.40
b	0.026	0.034	0.66	0.86
b1	0.046	0.054	1.17	1.37
c	0.016	0.024	0.40	0.60
D	0.287	0.303	7.30	7.70
E	0.417	0.433	10.60	11.00
e	0.089	0.092	2.25	2.33
e1	0.177	0.183	4.50	4.66
L	0.551	0.591	14.00	15.00
L1	0.075	0.098	1.90	2.50
Ø	0.122	0.130	3.10	3.30

8. Part Marking System

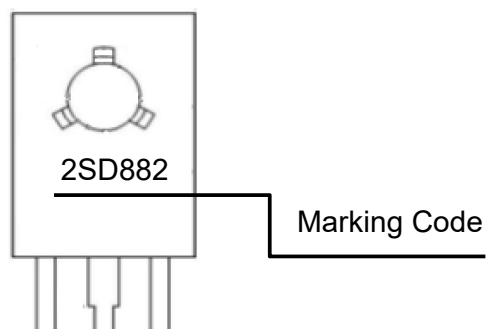

9. Package Information

Part Number	Package	Quantity(pcs)
2SD882	TO126	4000



Important Notice and Disclaimer

- Reproducing and modifying information of the document is prohibited without from XINNUO.
- XINNUO reserves the right to make changes to this document and its products and specifications.
- XINNUO disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- XINNUO does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the here in document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. XINNUO makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown her are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify XINNUO for any damages resulting from such improper use or sale.
- Since XINNUO uses lot number as the tracking base, please provide the lot number for tracking when complaining.